

Nano-Clear[®]



Nano-Clear[®] NCF for Fleet Vehicles

Extend Newly Painted or Existing Paint by 10+ Years

Achieve Unmatched Topcoat **Durability**



Nano-Clear®

Fleet Market

Fleet vehicle asset owners commonly apply protective topcoatings over steel surfaces to mitigate the effects of environmental exposure to the sun including oxidation, chemical attack damage, corrosion and desire for better appearance. Conventional fleet coatings "alone" are currently very susceptible to;

- UV degradation
- weathering
- acid rain
- water damage
- corrosion
- normal use

What is needed?

An improved surface coating that protects fleet vehicle assets more thoroughly than any existing technology. A permanent surface coating that will restore, enhance and extend the surface life of freshly painted or highly oxidized paint by 10+ years.

Nano-Clear NCF

Nano-Clear NCF dramatically improves **surface protection** and **brand image** while significantly reducing surface maintenance expenses and improving asset resale value.



- **Extreme Corrosion Resistance**

No Rust After 4000 Hour Salt Spray Testing

- **Extreme Abrasion Resistance**

Only 8.4mg loss after 1000 cycles, 1kg

- **Weatherproof Gloss**

99% Gloss Retention after 4000 Hours. Xenon WOM

- **1K Coating, Ambient (Humidity) Cured**

Dry-To-Handle in 4 hours; Return to Service in 24 hours

- **Reduce Re-Paint Cycle by 2X - 3X**

As Documented in Production Case Studies

- **Improve Brand Appearance**

Achieve Deeper Colors & Dramatically Higher Gloss

- **Achieve Lower Operating Costs**

By Reducing Maintenance Time & Extending Your Recoat Cycle By 10 Years...

Guaranteed!



What Makes NCF Unique?

Nano-Engineering (not nano-particles) Creates Exceptional Crosslink Density

Nano-Clear® NCF is manufactured using proprietary 3D nanostructured polymers - producing extreme crosslink density.

NCF provides extreme corrosion resistance, abrasion, chemical & UV resistance and reduced surface maintenance. NCF penetrates deep into the pores of freshly painted or highly oxidized paints to enhance color, improve gloss, dramatically increase surface hardness, improve chemical and long-term UV resistance.

Nano-Clear NCF is a one-component humidity cured / highly cross-linked polyurethane/polyurea hybrid nanocoating.

With this exceptionally high crosslink density, we have the test data to prove that NCF is the world's best all-around clearcoat for resistance to scratches, chips, abrasion, chemicals, weathering, and more. Please see the back cover for test results or <http://www.nanocoatings.com>.



BMW validated Nano-Clear coating to have the highest gloss levels and DOI of any clear coating system they had ever tested.



Before




Even with its remarkably high surface hardness (4H), NCF stays flexible. This iron-phosphated steel panel, painted with Macropoxy® 646 Epoxy and then coated with NCF bends in-half without cracking or any other failure to the coat. Call 810-227-0077 for technical questions.






Why is Crosslink Density So Important?

Coatings contain "building blocks" with functional groups. The chemical reaction of these groups during curing forms a network. In most traditional polymers, the network is a linear chain of molecules with low crosslink density.



Linear chain of molecules

Conversely, we "nano-structured" our clearcoat to have a 3D molecular architecture. The 3D polymer network has an exponentially higher number of crosslinked sites. The result is a tightly knit mesh with unprecedented DMA density.

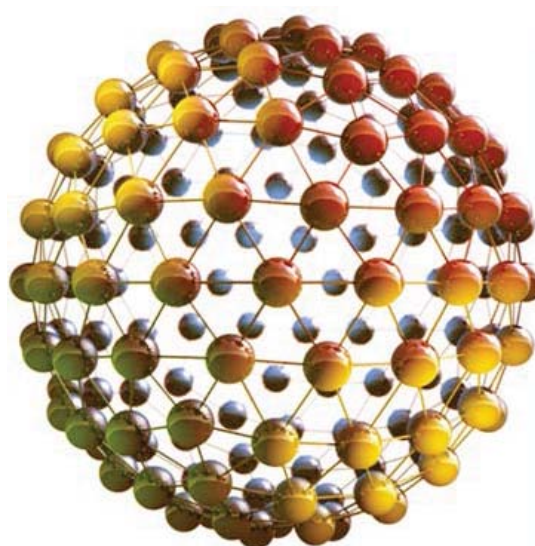

3D molecular architecture

High crosslink density provides highly functional surface properties, including unmatched corrosion resistance, scratch resistance, chemical resistance and UV durability. It also means low surface energy, repelling water (hydrophobic) and aiding in the release of ice, dirt, brake dust, and even concrete dust.



Even sticky concrete dust releases easily from Nano-Clear NCF

Unrivalled Color Restoration & Performance Enhancement for Highly Oxidized Coatings

For the last 30+ years, coating chemistries have been variations on the same (linear chain) polymer themes. As a result, industrial customers are on an endless treadmill: Painting, then watching the subsequent oxidization, loss of gloss, corrosion, and paint failure... requiring, in turn, labor-intensive surface prep and repainting with the same conventional coating technology.

Put simply: NCF restores the color, gloss, surface hardness and extends the surface life of conventional coatings by 10 years.

No matter how badly oxidized your existing coating is, Nano-Clear NCF for Fleet Vehicles will restore its color and provide unmatched surface protection.

Nano-Clear NCF is also designed to be applied directly over freshly coated surfaces including 2K epoxies, 2K polyurethanes and powder coatings.

Before



**After with
Nano-Clear NCF**





How Does NCF Restore Color?

NCF has a low (200 cps) viscosity, so it penetrates deep into the smallest pores of freshly painted or oxidized coatings, **turning the white, chalked layers transparent**, allowing the original underlying color to show through while fortifying/hardening the surface.

Humidity-cured at ambient temperatures, NCF quickly hardens and fortifies the painted surface, "locking-in" the restored color and preventing future chalking with its long-term UV absorbers.

Please note: NCF must be applied over the existing coating system before the coating has deteriorated into a powdered, peeled and/or eroding state. *NCF is not a rust converter.* Rust or peeling paints must be removed and repainted first with a coating such as a high solids, two-component epoxy, like Macropoxy® 646, prior to applying NCF.

For additional details please review the Nano-Clear NCF Technical Data Sheet
<http://www.nanocoatings.com/ncftds.pdf>

Fleet Users of
Nano-Clear NCF



ODEBRECHT
Oil & Gas



STERLING CRANE



Where Could You Use NCF?

On New or Highly Oxidized Coatings:

e.g., 2K epoxies, 2K polyurethanes, powder coatings, polyesters, gel coats, e-coats, fiberglass, and anodized aluminum (to prevent filiform corrosion, etc.).

For Fleet Vehicles & Equipment:

e.g., rail tank cars, fuel tanks, heavy duty equipment, earth moving equipment, ships, fleet vehicles, plant floors, painted building structures, light posts, transformer housings, pumps, valves, lifeboats, oil platforms, pipelines, shipping containers, etc.



Problem: Leading soda pop company owns a global fleet of distribution trucks in need of paint restoration.

Solution: NCF is used to dramatically improve the overall image of this leading soda brand, while reducing the re-paint cycle and reducing fleet maintenance. See other Nano-Clear case studies <http://www.nanocoatings.com/casestudies>

Call Nanovere at **810-227-0077** to arrange a Nano-Clear NCF application demonstration
info@nanocoatings.com



Nano-Clear® NCF Coating Specifications

Recommended Uses: On Highly Oxidized Paints or Freshly Painted Surfaces

Chemistry: Nano-Structured Polyurethane / Polyurea Hybrid

PROPERTY/TEST	TEST METHOD	RESULTS	TESTING SOURCE
Crosslink Density	DMA (Dynamic Mechanical Analysis)	2.17 (X10 ³ mol/m ³)	Nippon Paint
VOC	ASTM D3960	1.25 lb/gal (150 g/l)	Nanovere
Recommended Dry Film Thickness	ASTM D5796	1 mil to 2 mils	Nanovere
Coverage	Nanovere	1122 sq ft/gal (at 1 mil)	Nanovere
Gloss 20° / 60°	ASTM D523	86.0 / 92.2	Stonebridge Technical Services
ABUSE RESISTANCE			
Abrasion Resistance (CS-17, 1 kg, 1000 cycles)	ASTM D4060	8.4 mg loss	Nippon Paint
Pencil Hardness, Scratch	ASTM D3363	4H	Stonebridge
Scratch Hardness	SASO 2833	2500 gm	Saudi Standards, Metrology, & Quality Organization (SASO)
Pencil Hardness, Gouge	ASTM D3363	5H	Stonebridge
Pendulum Hardness (Persoz)	ASTM D4366	> 250 oscillations	Nippon Paint
Impact Resistance 18°C Direct in/lbs	ASTM D2794	50 Pass / 60 Fail	Stonebridge
Impact Resistance 18°C Reverse in/lbs	ASTM D2794	10 Pass / 20 Fail	Stonebridge
Impact Resistance	SASO ISO 3248	1 kg - 160 cm	SASO
Impact Strength	ASTM D2794	145 kg-cm	SASO
Chip Resistance 23°C (2 mils)	ASTM D3170	7A	Stonebridge
Chip Resistance -29°C (2 mils)	ASTM D3170	7B	Stonebridge
Falling Sand Abrasion 100 liters	ASTM D968	Pass	Stonebridge
Mar Resistance	ASTM D5178	5.0 kg	SASO
ENVIRONMENTAL RESISTANCE			
Xenon WOM Resistance 4000 hrs	SAE J1960	100% Gloss Retention	Stonebridge
	ASTM G155	99% Gloss Retention	Nippon Paint
QUV 313, >1500 hrs	ASTM D4587	100% Gloss Retention	Nippon Paint
Water Immersion Test 240 hrs @ 50°C	ISO 2812-2	Pass	Nippon Paint
Salt Spray, 4000 hrs	SASO ISO 11997	Excellent	SASO
Humidity, 100% RH, 100°F, 240 hrs	ASTM D 1735-02	No loss of adhesion. No change.	American Racing Custom Wheels
CASS 240 hrs @ 50°C	JIS H8502-7	Pass	Nippon Paint
Thermal Shock (100°F 3 hrs, Freeze 3 hrs, Steam Blast 30 sec)	GM9525P	No loss of adhesion. No Change.	American Racing Custom Wheels
CHEMICAL RESISTANCE			
10% Sulfuric Acid	ASTM D 1308	No effect	Stonebridge
10% Hydrochloric Acid	ASTM D 1308	No effect	Stonebridge
10% Sodium Hydroxide	ASTM D 1308	No effect	Stonebridge
10% Ammonium Hydroxide	ASTM D 1308	No effect	Stonebridge
Isopropyl Alcohol	ASTM D 1308	No effect	Stonebridge
Xylene	ASTM D 1308	No effect	Stonebridge
Skydrol® 500 Fluid	ASTM D6943-A	No effect	Stonebridge
MEK Resistance	ASTM 4752	1500 double rubs	Stonebridge
ADHESION, FLEXIBILITY & CLEANING			
Adhesion, Direct to Metal	ASTM D4541	3 Mpa	SASO
Adhesion, Cross Cut	SASO ISO 2409	Rating 10	SASO
Flexibility, 1mm Mandrel	SASO 2833	Passed (Very Good)	SASO
Flexibility, Cylindrical Mandrel	SASO ISO 1519	3 mm Passed (Excellent)	SASO
Flammability: Fire Retardant & Flame Spread	ASTM E84 / BS476	Class 1 (Excellent)	SASO
De-Icing Aid	Coated equipment frozen in 20 ft freezer	It was possible to flake off ice bits and melting was faster.	Schlumberger
Self-Cleaning Properties		Oil & Dirt Release; Hydrophobic, Brake-Dust Release	Nippon Paint
APPLICATION HIGHLIGHTS			
Pot Life	1 Component (1K)	Relative Humidity	20% to 80%
Viscosity	200 cps	Dry Time: Dust Free @ 68-72°F	30 minutes
Spray Applicators	HVLP, Conventional or Airless	Dry-To-Handle @ 68-72°F	4 hours
Wipe-On Application	ShurLine® Deck Pad	Recommended for small areas	Yes
Application Temp	40°F to 90°F		
Operating (Service) Temp	-40°F to 250°F		



Nanovere Technologies, LLC
 4023 S. Old US 23, Suite 101
 Brighton, MI 48114 USA
 810-227-0077

info@nanocoatings.com • <http://www.nanocoatings.com>